

picture showing high pressure part as well

Pump type	Art. no.	Rpm max.	Power input max.	Pump output max. at 10 bar Hs 3,0 m	Weight	Dimensions
		min ⁻¹	kW (HP)	l/min	approx. kg	approx. LxWxH mm
FPN 10-10000-1HR	022176	2500	330 (450)	10500	210	730x760x770
FPN 10-10000-1AR	022178					

Basic equipment:

1stage centrifugal fire pump in clockwise rotational direction, suction inlet flange inside dia. 230 mm, delivery outlet flange inside dia. 155 mm.

Priming system: fully automatic TROKOMAT PLUS, integrated pump gearbox.

Gauges and controls:

1 pressure gauge
1 mano-vacuummeter
1 working hour meter


Paintwork:

silver coloured RAL 9006

Drive:

via joint shaft from p.t.o. of the vehicle gearbox or pump unit

FPN 10-10000

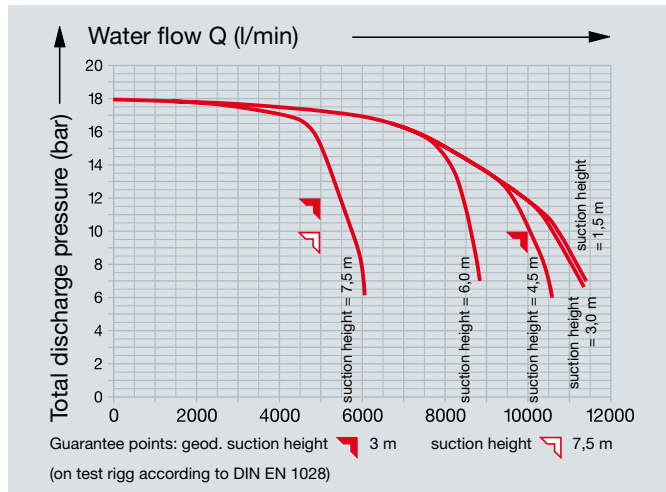

FPN 10-10000-1

Auxiliary equipment and systems

on request, additionally charged:
 one central suction inlet DN 250 (to water tank), alternatively
 3x F DN 150 led together via collector piece, up to 8 delivery outlets
 size B or optionally 2 delivery outlets size A lockable by intermediate
 flaps, up to 2 delivery outlets to the rapid intervention lines, 1 outlet
 for tank filling line, up to 2 turret outlets, installation of up to 2 pump
 proportioners, automatic pressure governor, TROKOMAT PLUS shut-
 off, EAD.